


# Europa-Rückschlagventil

Europa-Rückschlagventil  
Europa non-return valve  
Valvola di non ritorno F.F.

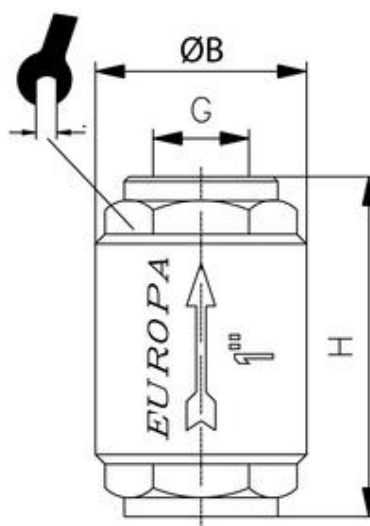

Code	G	ØB	H	P*	sw
6036-DN20	G3/4	41,5	65	25	33

Betriebstemperatur:	-20 °C bis +100 °C
Operating temperature:	-20 °C to +100 °C
Temperatura di esercizio:	da -20 °C a +100 °C
Körper:	Messing, sandgestrahlt
Body:	brass sand-blasted
Corpo:	ottone sabbiato
Ventilteller:	Edelstahl
Valve disc:	stainless steel
Diaframma:	acciaio inox
Dichtung:	NBR
Seal:	NBR
Guarnizione:	NBR
Gewinde:	DIN EN ISO 228
Thread:	DIN EN ISO 228
Filettatura:	DIN EN ISO 228
Medien:	Industrie, Pneumatik, Sanitär, Heißwasser, Gase und Druckluft.
Media:	industry, pneumatics, sanitary, hot water, gases and compressed air.
Media:	industria, pneumatica, sanitaria, acqua calda, gas e aria compressa.
Einbauposition:	beliebig
Mounting position:	any position
Posizione di montaggio:	in qualsiasi posizione