


# Europa-Rückschlagventil

Europa-Rückschlagventil  
Europa non-return valve  
Valvola di non ritorno F.F.

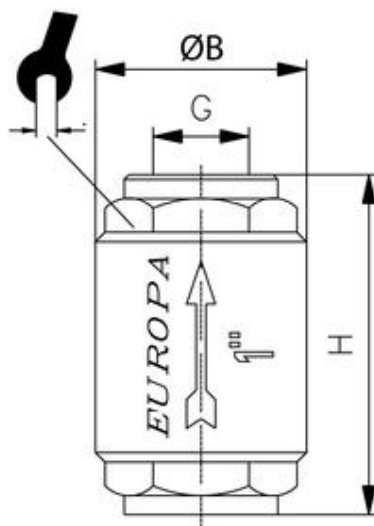

| Code      | G  | ØB | H    | P* | sw |
|-----------|----|----|------|----|----|
| 6036-DN25 | G1 | 48 | 74,5 | 25 | 40 |

|                           |  |
|---------------------------|--|
| Betriebstemperatur:       | -20 °C bis +100 °C   |
| Operating temperature:    | -20 °C to +100 °C  |
| Temperatura di esercizio: | da -20 °C a +100 °C  |
| Körper:                   | Messing, sandgestrahlt   |
| Body:                     | brass sand-blasted   |
| Corpo:                    | ottone sabbiato  |
| Ventilteller:             | Edelstahl  |
| Valve disc:               | stainless steel  |
| Diaframma:                | acciaio inox   |
| Dichtung:                 | NBR  |
| Seal:                     | NBR  |
| Guarnizione:              | NBR  |
| Gewinde:                  | DIN EN ISO 228   |
| Thread:                   | DIN EN ISO 228   |
| Filettatura:              | DIN EN ISO 228   |
| Medien:                   | Industrie, Pneumatik, Sanitär, Heißwasser, Gase und Druckluft.       |
| Media:                    | industry, pneumatics, sanitary, hot water, gases and compressed air. |
| Media:                    | industria, pneumatica, sanitaria, acqua calda, gas e aria compressa. |
| Einbauposition:           | beliebig   |
| Mounting position:        | any position   |
| Posizione di montaggio:   | in qualsiasi posizione   |