



# STXRFU

## Line flow control (stainless steel) Regolatore di flusso in linea - Inox

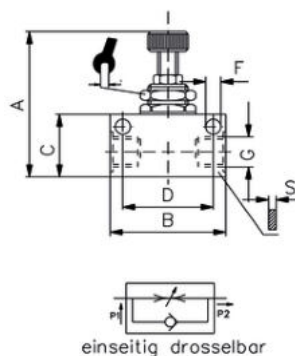

| Code       | G    | A  | B  | C  | D  | F   | S  |  |
|------------|------|----|----|----|----|-----|----|---|
| STXRFU-1/8 | G1/8 | 56 | 34 | 21 | 24 | 4,5 | 16 | 15  |
| STXRFU-1/4 | G1/4 | 75 | 50 | 30 | 35 | 6,5 | 25 | 22  |

Druckbereich 0-10bar

Pressure range 0-10bar

Pressione di esercizio 0-10bar

Betriebstemperatur 0°C bis +150°C

Operating temperature 0°C to +150°C

Temperatura di esercizio da 0°C a +150°C

Gehäuse - body AISI 316L

Body AISI 316L

Corpo AISI 316L

Dichtung - sealing FKM

Sealing FKM

Guarnizioni FKM

für geölte und ungeölte Druckluft

for lubricated and non-lubricated compressed air

per aria compressa sia lubrificata che non