


Schnellentlüftungsventil VSR

Quick exhaust valve
Valvola di scarico rapido

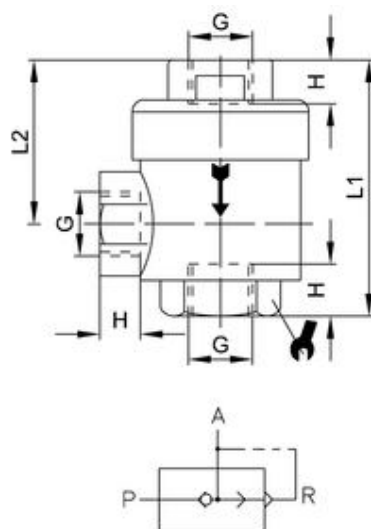

| Code | G | H | L1 | L2 | sw | NI/min* 1 | NI/min* 2 |
|--------|----|-----|----|------|----|-----------|-----------|
| VSR-M5 | M5 | 4,5 | 25 | 16,5 | 10 | 220 | 300 |

| | |
|-------------------------------------|-------------------------|
| Körper: | CW617N vernickelt |
| Body: | CW617N nickel-plated |
| Corpo: | ottone CW617N nichelato |
| Dichtung Körper: | Nylon |
| Seals body: | Nylon |
| Guarnizione tenuta corpo/coperchio: | Nylon |
| Membran: | PU |
| Membrane: | PU |
| Elemento di tenuta: | PU |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -20 °C bis +80 °C |
| Working temperature: | -20 °C up to +80 °C |
| Temperatura di esercizio: | da -20 °C a +80 °C |
| Betriebsdruck: | 0,5 - 10 bar |
| Working pressure: | 0,5 - 10 bar |
| Pressione di esercizio: | da 0,5 a 10 bar |

Für geölte und ungeölte Druckluft.
For lubricated and non-lubricated compressed air.
Per aria compressa sia lubrificata che non.

NI/min 1: P->A NI/min 2: A->R